

## Ridgeline Highbay



- Wattage: 100W, 120W, 150W, 200W and 250W
- Long life: Rated life of 100,000 hours
- High index, CRI: 85; Makes colors look more true and vibrant
- Vibration resistant: Electrodeless design allows for use in high vibration applications
- Instant on/instant re-strike
- Applications: Warehouse, Retail, Show Rooms, Repair Facilities

### Housing

- Rugged die-cast aluminum control gear
- Electrostatic powder-coated surface for corrosion-resistance and long life
- Choice of reflector : 22" Low Profile spun aluminum, 22" faceted aluminum, 22" clear prismatic
- Optional lens options available
- Gas tight silicon rubber seals
- EZ hook for quick installation
- Protection class: IP43 (Solid bodies diameter 1mm and rainfall)

### Specification

#### Induction Lamp


Wattage (W)	Luminance (LM)	CRI	Color temperature (Kelvin)	Rated life (Hours)
100	8,500	85	5,000	100,000
120	10,200	85	5,000	100,000
150	12,750	85	5,000	100,000
200	17,000	85	5,000	100,000
250	21,250	85	5,000	100,000

#### Driver

Wattage (W)	Input voltage range(VAC)	Input current (A)	Input frequency	Power factor	Operating temp	Input power (W)
100	120/277	0.90-0.41	50-60Hz	0.98	-30 to 122°F	110
120	120/277	1.08-0.49	50-60Hz	0.98	-30 to 122°F	127
150	120/277	1.38-0.60	50-60Hz	0.98	-30 to 122°F	160
200	120/277	1.77-0.77	50-60Hz	0.98	-30 to 122°F	210
250	120/277	2.21-0.96	50-60Hz	0.98	-30 to 122°F	263

## Ridgeline Highbay

### Dimensions

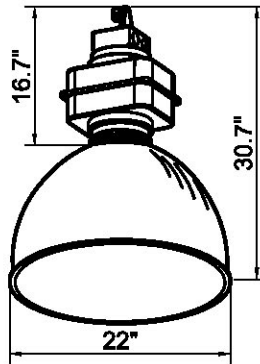

### Ordering Guide

Reference	Description
RI-120/277V-100W-5K-AL22-00	Ridgeline Highbay, 120-277 Volt, 100 Watt, 5000K, Low Profile Al 22"
RI-120/277V-120W-5K-AL22-00	Ridgeline Highbay, 120-277 Volt, 120 Watt, 5000K, Low Profile Al 22"
RI-120/277V-150W-5K-AL22-00	Ridgeline Highbay, 120-277 Volt, 150 Watt, 5000K, Low Profile Al 22"
RI-120/277V-200W-5K-AL22-00	Ridgeline Highbay, 120-277 Volt, 200 Watt, 5000K, Low Profile Al 22"
RI-120/277V-250W-5K-AL22-00	Ridgeline Highbay, 120-277 Volt, 250 Watt, 5000K, Low Profile Al 22"
RI-120/277V-100W-5K-AL22-00	Ridgeline Highbay, 120-277 Volt, 100 Watt, 5000K, Al 22"
RI-120/277V-120W-5K-AL22-00	Ridgeline Highbay, 120-277 Volt, 120 Watt, 5000K, Al 22"
RI-120/277V-150W-5K-AL22-00	Ridgeline Highbay, 120-277 Volt, 150 Watt, 5000K, Al 22"
RI-120/277V-200W-5K-AL22-00	Ridgeline Highbay, 120-277 Volt, 200 Watt, 5000K, Al 22"
RI-120/277V-250W-5K-AL22-00	Ridgeline Highbay, 120-277 Volt, 250 Watt, 5000K, Al 22"
RI-120/277V-100W-5K-CL22-00	Ridgeline Highbay, 120-277 Volt, 100 Watt, 5000K, PC 22"
RI-120/277V-120W-5K-CL22-00	Ridgeline Highbay, 120-277 Volt, 120 Watt, 5000K, PC 22"
RI-120/277V-150W-5K-CL22-00	Ridgeline Highbay, 120-277 Volt, 150 Watt, 5000K, PC 22"
RI-120/277V-200W-5K-CL22-00	Ridgeline Highbay, 120-277 Volt, 200 Watt, 5000K, PC 22"
RI-120/277V-250W-5K-CL22-00	Ridgeline Highbay, 120-277 Volt, 250 Watt, 5000K, PC 22"

### Options

Reference	Description
Call for details	Motion Sensor
Call for details	Photo Control
Call for details	Tempered Flat Glass Lens Cover
Call for details	Clear Drop Acrylic Lens Cover
Call for details	Prismatic Lens Cover